

SIRIUS safety relay with relay enabling circuits (EC) 24 V DC, 45 mm overall width Screw terminal EC instantaneous: 2 NO + 2 NC EC delayed: 0 SC: 0 Press control device maximum achieved SIL: 3, PL: e



Figure similar

General technical data	
Product brand name	SIRIUS
Product designation	safety relays
Design of the product	for press control units
Protection class IP of the enclosure	IP20
Protection class IP of the terminal	IP20
Protection against electrical shock	finger-safe
Insulation voltage rated value	300 V
Ambient temperature	
• during storage	-40 ... +80 °C
• during operation	-25 ... +60 °C
Air pressure acc. to SN 31205	90 ... 106 kPa
Relative humidity during operation	10 ... 95 %
Installation altitude at height above sea level maximum	2 000 m
Vibration resistance acc. to IEC 60068-2-6	5 ... 500 Hz: 0,075 mm
Shock resistance	8g / 10 ms
Surge voltage resistance rated value	4 000 V

EMC emitted interference	EN 60947-5-1
Installation environment regarding EMC	This product is suitable for Class A environments only. It can cause undesired radio-frequency interference in residential environments. If this is the case, the user must take appropriate measures.
Reference identifier acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	KT
Reference identifier acc. to DIN EN 61346-2	F
Number of sensor inputs	
• 2-channel	1
Design of the cascading	none
Type of the safety-related wiring of the inputs	two-channel
Product feature cross-circuit-proof	Yes
Safety Integrity Level (SIL)	
• acc. to IEC 61508	3
SIL Claim Limit (subsystem) acc. to EN 62061	3
Performance level (PL)	
• acc. to EN ISO 13849-1	e
Category acc. to EN 954-1	4
Category acc. to EN ISO 13849-1	4
Hardware fault tolerance acc. to IEC 61508	1
Safety device type acc. to IEC 61508-2	Type A
PFHD with high demand rate acc. to EN 62061	0.0000000014 1/h
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Number of outputs as contact-affected switching element	
• as NC contact	
— for signaling function instantaneous contact	0
• as NO contact	
— safety-related instantaneous contact	4
— safety-related delayed switching	0
Number of outputs as contact-less semiconductor switching element	
• safety-related	
— delayed switching	0
— instantaneous contact	0
• for signaling function	
— delayed switching	0
— instantaneous contact	0
Stop category acc. to DIN EN 60204-1	0

General technical data

Design of input	
• cascading input/functional switching	No
• feedback input	Yes
• Start input	No
Type of electrical connection Plug-in socket	Yes
Operating frequency maximum	1 000 1/h
Switching capacity current	
• of the NO contacts of the relay outputs at DC-13	
— at 24 V	6 A
— at 115 V	0.2 A
— at 230 V	0.1 A
• of the NO contacts of the relay outputs at AC-15	
— at 115 V	5 A
— at 230 V	5 A
• of the NC contacts of the relay outputs at DC-13	
— at 24 V	6 A
— at 115 V	0.2 A
— at 230 V	0.1 A
• of the NC contacts of the relay outputs at AC-15	
— at 115 V	5 A
— at 230 V	5 A
Thermal current of the switching element with contacts maximum	6 A
Electrical endurance (switching cycles) typical	100 000
Mechanical service life (switching cycles) typical	10 000 000
Design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required	gL/gG: 6 A, or quick: 10 A
DC resistance of the cable maximum	30 Ω
Wire length between sensor and electronic evaluation device with Cu 1.5 mm² and 150 nF/km maximum	1 000 m
Make time with automatic start	
• at DC maximum	100 ms
Recovery time after opening of the safety circuits typical	250 ms
Control circuit/ Control	
Type of voltage of the control supply voltage	DC
Control supply voltage 1	
• at DC rated value	24 V

Operating range factor control supply voltage rated value of magnet coil	
<ul style="list-style-type: none"> • at AC <ul style="list-style-type: none"> — at 50 Hz — at 60 Hz • at DC 	<p>0.85 ... 1.1</p> <p>0.85 ... 1.1</p> <p>0.85 ... 1.1</p>

Installation/ mounting/ dimensions	
Mounting position	any
Mounting type	screw and snap-on mounting
Width	44.8 mm
Height	138.5 mm
Depth	120 mm

Connections/Terminals	
Type of electrical connection	screw-type terminals
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • solid 	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
<ul style="list-style-type: none"> • finely stranded <ul style="list-style-type: none"> — with core end processing 	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
Type of connectable conductor cross-sections at AWG conductors	
<ul style="list-style-type: none"> • solid 	2x (20 ... 14)
<ul style="list-style-type: none"> • stranded 	2x (20 ... 14)

Product Function	
Product function	
<ul style="list-style-type: none"> • Light barrier monitoring • Standstill monitoring • protective door monitoring • Automatic start • magnetically operated switch monitoring NC-NO • rotation speed monitoring • laser scanner monitoring • monitored start-up • Light array monitoring • magnetically operated switch monitoring NC-NC • EMERGENCY OFF function • Pressure-sensitive mat monitoring 	<p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>Yes</p> <p>No</p>
Suitability for interaction press control	Yes
Suitability for use	
<ul style="list-style-type: none"> • Monitoring of floating sensors 	Yes

- | | |
|---|-----|
| • Monitoring of non-floating sensors | No |
| • safety switch | Yes |
| • position switch monitoring | Yes |
| • EMERGENCY-OFF circuit monitoring | Yes |
| • valve monitoring | No |
| • tactile sensor monitoring | No |
| • magnetically operated switch monitoring | No |
| • safety-related circuits | Yes |

Certificates/approvals

Certificate of suitability	BG, SUVA, UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508, EN 574
• TÜV (German technical inspectorate) certificate	Yes
• UL approval	Yes
• BG BIA certificate	Yes

General Product Approval

EMC

Functional Safety/Safety of Machinery



[Type Examination](#)

Declaration of Conformity

Test Certificates

other



[Special Test Certificate](#)

[Environmental Confirmations](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TK2834-1BB40>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TK2834-1BB40>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3TK2834-1BB40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TK2834-1BB40&lang=en

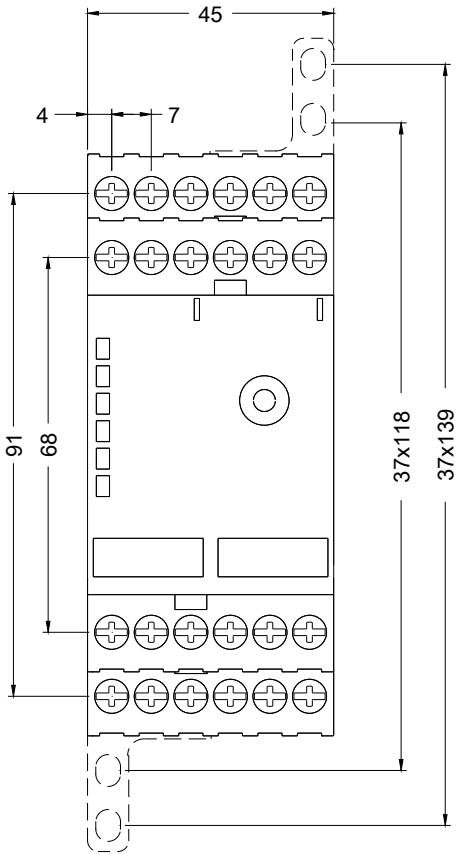

last modified:

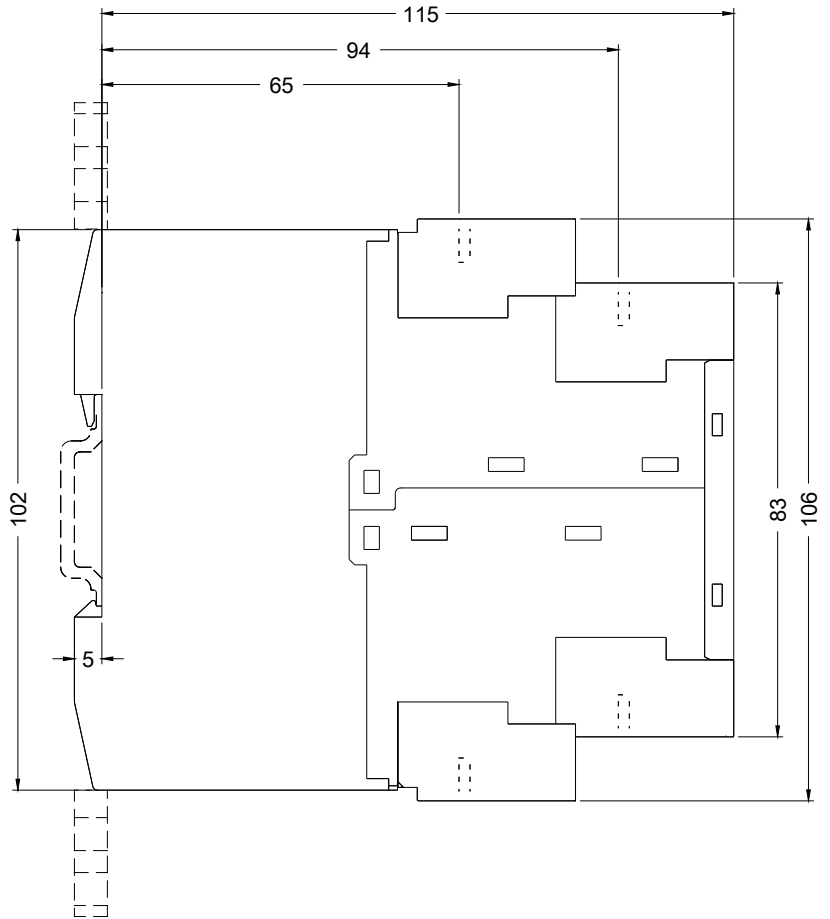

10/23/2018